

# LUNA

## ES

**Montaje:** Adosable.  
**Fuente de luz:** Módulos lineales LED SMD.  
 Temperatura de color 4000K (estándar).  
 Disponible, 3000K.  
**Sistema óptico:** Reflector.  
**Distribución luminosa:** Simétrica.  
**Equipo eléctrico:** Equipo de control electrónico. PF>0,95.  
 Disponible, regulable DALI y/o kit de emergencia (1-3 h).  
**Materiales:** Cuerpo: Policarbonato color blanco. Cierres: Policarbonato.  
 Difusor: Policarbonato opal autoextinguible estabilizado a los rayos uva.  
**Acabado:** Color blanco RAL 9003 (estándar).  
 Disponible, gris RAL 9006, negro RAL 9005.




## EN



**Mounting:** Surface.  
**Light source:** LED linear modules SMD.  
 Temperature color 4000K (standard).  
 Available, 3000K.  
**Optical system:** Reflector.  
**Light distribution:** Symmetrical.  
**Electrical equipment:** Electronic control gear. PF>0,95.  
 Available, dimmable DALI and/or emergency kit (1-3 h).  
**Materials:** Body: Polycarbonate in white color. Cover: Polycarbonate.  
 Diffuser: Self extinguishing opal polycarbonate UV stabilized.  
**Surface finish:** White color RAL 9003 (standard).  
 Available, grey RAL 9006, black RAL 9005.



LUNA-430-IP65-25W

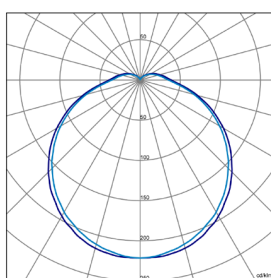

FLICKER FREE

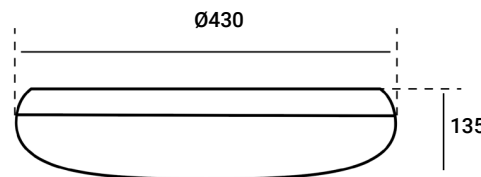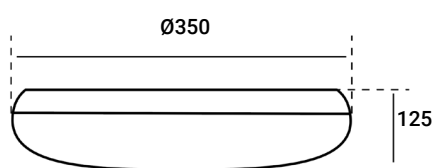

### ESTANDAR/STANDARD

5 AÑOS / 5 YEARS  
 220-240V / 50-60Hz  
 IP 65  
 IK 08  
 CLASE II / CLASS II  
 50.000h / L80B10  
 -20° / +35°  
 CRI 80

### DISPONIBLE/AVAILABLE

DALI  
 3000K  
 EMERGENCY KIT  
 1h / 3h

### CONFIGURACION ONLINE / ONLINE CONFIGURATION



Código / Code	Referencia / Reference	Kg / Kg	Potencia / Power	Lúmenes / Lumens	Eficiencia / Efficiency	CCT (K) / CCT (K)
LNA122K0B	LUNA-350 IP65 16W 2800Lm/840	1,5	16W	1500	175 lm/W	4000
LNA224K0B	LUNA-430 IP65 25W 4700Lm/840	2,1	25W	4700	188 lm/W	4000

### ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI    KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h    T.COLOR 3000K, 6000K    DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)