

T55/SYM

ES



Montaje: Empotrado.

Fuente de luz: Módulos lineales LED SMD VOSSLOH.

Temperatura de color 4000K.

Disponible, 3000K, 5000K, 6000K.

Sistema óptico: Óptica o lente configurable.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.

Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Perfil de aluminio extruido. Óptica: Material termoplástico opalino. Garras, tapas y uniones incluidas.

Acabado: Color blanco RAL 9003.

Disponible, gris RAL 9006, negro RAL 9005.

EN



Mounting: Recessed.

Light source: VOSSLOH LED SMD linear modules.

Temperature color 4000K.

Available, 3000K, 5000K, 6000K.

Optical system: Optics or configurable lens.

Light distribution: Direct.


Electrical equipment: Electronic control gear. PF>0,95.

Available, dimmable 1-10V o DALI and/or emergency kit (1-3 h).

Materials: Body: Extruded aluminum profile. Optic: PMMA thermoplastic material. Fixing pieces, cover and joint included.

Surface finish: White color RAL 9003.


Available, grey RAL 9006, black RAL 9005.

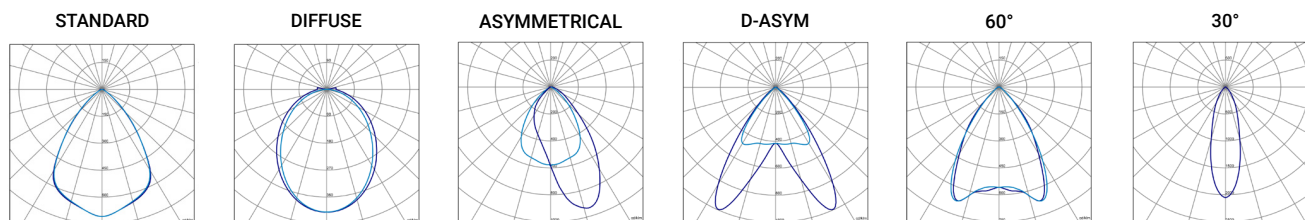


Detalle de óptica/Lens detail

BAJO CONSULTA/UNDER REQUEST

TUNABLE WHITE

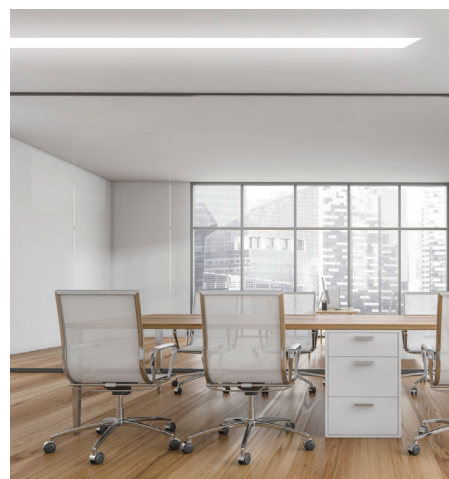

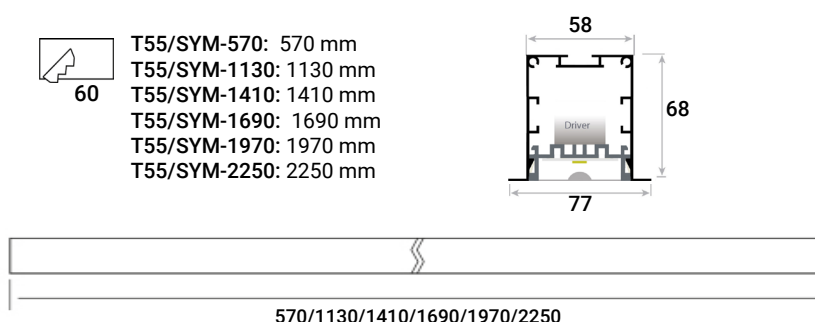

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS
 220-240V / 50-60Hz
 IP 40
 IK 02
 CLASE I / CLASS I
 50.000h / L80B10
 -20° / +35°
 CRI 80

DISPONIBLE/AVAILABLE

1-10V / DALI
 3000K / 6000K
 EMERGENCY
 1h / 3h

CONFIGURACION ONLINE
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
T5S212K5B	T55/SYM-570-16W-2540lm/840	1,7	16W	2540	159 lm/W	4000
T5S213K6B	T55/SYM-570-24W-3600lm/840	1,7	24W	3600	150 lm/W	4000
T5S315K0B	T55/SYM-1130-32W 5080lm/840	2,7	32W	5080	159 lm/W	4000
T5S317K2B	T55/SYM-1130-48W 7200lm/840	2,7	48W	7200	150 lm/W	4000
T5S416K3B	T55/SYM-1410-40W 6350lm/840	3,2	40W	6350	159 lm/W	4000
T5S419K0B	T55/SYM-1410-60W 9000lm/840	3,2	60W	9000	150 lm/W	4000
T5S517K6B	T55/SYM-1690-48W 7600lm/840	3,7	48W	7600	158 lm/W	4000
T5S5110KB	T55/SYM-1690-72W 10800lm/840	3,7	72W	10800	150 lm/W	4000
T5S618K8B	T55/SYM-1970-56W 8850lm/840	4,2	56W	8850	158 lm/W	4000
T5S6112KB	T55/SYM-1970-84W 12600lm/840	4,2	84W	12600	150 lm/W	4000
T5S7110KB	T55/SYM-2250-64W 10150lm/840	5,2	64W	10150	159 lm/W	4000
T5S7114KB	T55/SYM-2250-96W 14400lm/840	5,2	96W	14400	150 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 3000K, 5000K, 6000K
 REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP) DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)
 ELECTRIFICACION LC 5 POLOS/ELECTRIFICACION LC 5 PINES ELECTRIFICACION LC 3 POLOS/ELECTRIFICACION LC 3 PINES