

## MEGAMARINE

### ES

**Montaje:** Adosado mediante lira.

**Fuente de luz:** PHILIPS LUXEON 5050.

Temperatura de color 5000K.

Disponible, 3000K, 4000K, 6000K.

**Sistema óptico:** Reflector simétrico 30° (estándar).

Disponible, 60°, 90° o ASYM°.

**Distribución luminosa:** Directa.

**Equipo eléctrico:** Equipo de control electrónico. PF>0,95.

Meanwell HLG.

**Materiales:** Cuerpo: Fundición de aluminio LM6 + AKZO NOBEL de muy alta disipación térmica. **Recubrimiento anticorrosivo C5-M MARINE** según ISO 12944.

**Acabado:** Color gris con superficies rectificadas para garantizar una buena conducción térmica entre el módulo LED y el cuerpo.



### EN

**Mounting:** Surface using bracket.

**Light source:** PHILIPS LUXEON 5050.

Temperature color 5000K.

Available, 3000K, 4000K, 6000K.

**Optical system:** Symmetric reflector 30° (standard).


Available, 60°, 90° or ASYM°.

**Light distribution:** Direct.

**Electrical equipment:** Electronic control gear. PF>0,95. Meanwell HLG.


**Materials:** Body: Die-cast aluminum LM6 + AKZO NOBEL of very high thermal dissipation. **C5-M MARINE anticorrosive coating** according to ISO 12944.

**Surface finish:** Grey color with rectified surface to ensure good heat conduction between the LED module and body.

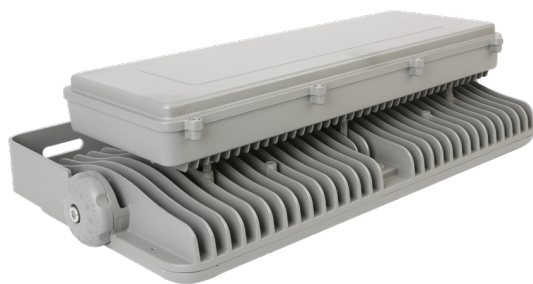

ESTANDAR | STANDARD

30°








60°




90°

ASYM

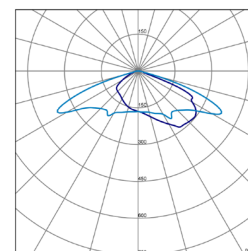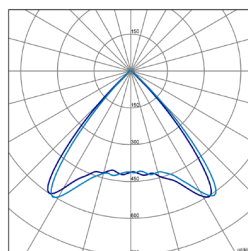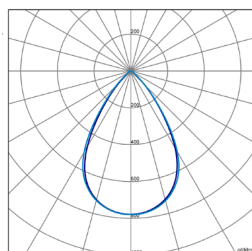
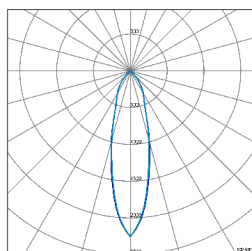


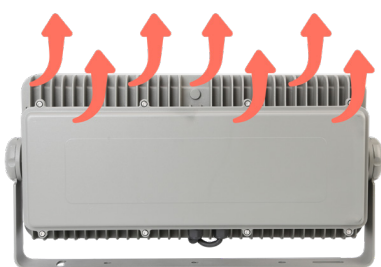

DISIPADORES DE CALOR DE ALTO RENDIMIENTO  
HIGH PERFORMANCE HEATSINK

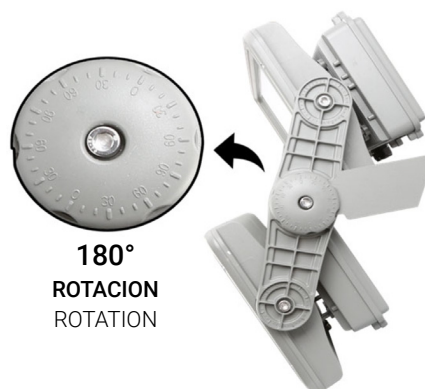

180°  
ROTACION  
ROTATION

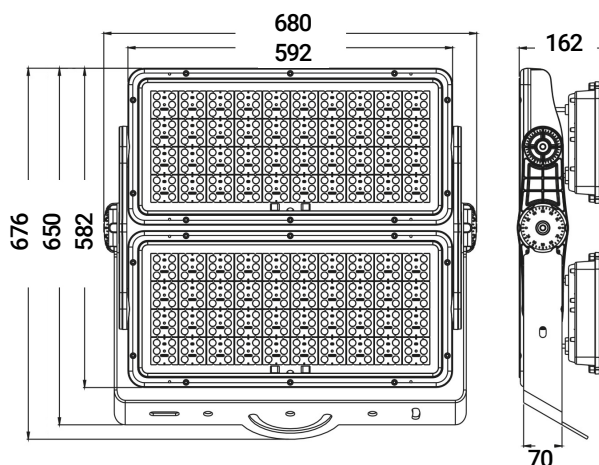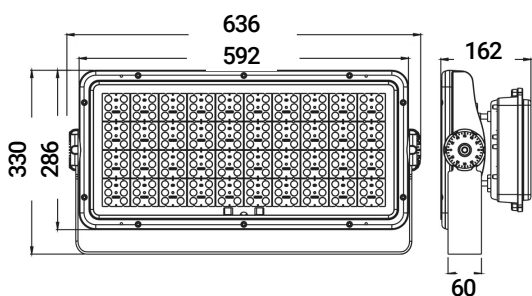

ESTANDAR/STANDARD

- 5 AÑOS  
5 YEARS
- 220-240V  
50-60Hz
- 277V  
50-60Hz
- IP 65
- IK 08
- CLASE I  
CLASS I
- 50.000h  
L80B10
- 20°  
+40°
- CRI 80
- 30°

DISPONIBLE/AVAILABLE

- 1-10V  
DALI
- 3000K  
4000K  
6000K
- 60°  
90°  
ASYM

CONFIGURACION ONLINE  
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
MMN4180KG	MEGAMARINE/30°-L-IP66-480W 80000Lm/850	16	480W	80000	167 lm/W	5000
MMN811C6G	MEGAMARINE/30°-XL-IP66-960W 160000Lm/850	36	960W	160000	167 lm/W	5000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI T.COLOR 3000K, 4000K, 6000K OPTICA/LENS 60°, 90°, ASYM