

**PLANET/N CIRCULAR ABIERTO | PLANET/N CIRCULAR OPENED**

**ES**




**Montaje:** Suspendido.  
**Fuente de luz:** Módulos lineales LED SMD TRIDONIC. Temperatura de color 4000K . Disponible, 3000K.  
**Sistema óptico:** Difusor opal.  
**Distribución luminosa:** Directa.  
**Equipo eléctrico:** Equipo de control electrónico. PF>0,95. Disponible, regulable DALI.  
**Materiales:** Cuerpo: Aluminio extruido lacado en blanco. Difusor: Opal PMMA. Incluye suspensión de 2 m, cable transparente de conexión y florón.  
**Acabado:** Color blanco RAL 9003 (estándar). Opcional gris RAL 9006, negro RAL 9005. Otros colores RAL disponibles bajo consulta.

**EN**



**Mounting:** Suspended.  
**Light source:** TRIDONIC SMD LED linear modules. Temperature color 4000K. Available, 3000K.  
**Optical system:** Opal diffuser.  
**Light distribution:** Direct.  
**Electrical equipment:** Electronic control gear. PF>0,95. Available, dimmable DALI.  
**Materials:** Body: Aluminum extruded lacquered in white. Diffuser: Opal PMMA. 2 m rope suspension, transparent cable and ceiling base included.  
**Surface finish:** Standard color white RAL 9003. Optional grey RAL 9006, black RAL 9005. Other RAL colors under request.

PLANET/N CIR. ABIERTO-131W



BLANCO/WHITE  
 ESTANDAR COLOR BLANCO  
 STANDARD WHITE COLOR




GRIS/GREY




NEGRO/BLACK




PLANET/N CIRCULAR ABIERTO 640



PLANET/N CIRCULAR ABIERTO 840

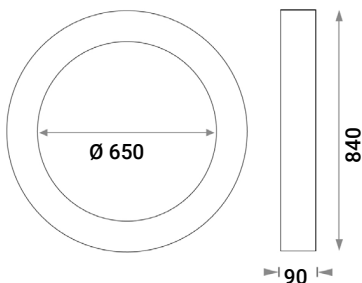

PLANET/N CIRCULAR ABIERTO 1045

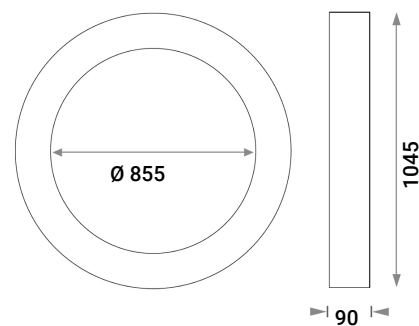

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS  
 220-240V / 50-60Hz  
 IP 40  
 IK 04  
 CLASE I / CLASS I  
 50.000h / L80B10  
 -20° / +35°  
 CRI 80

DISPONIBLE/AVAILABLE

DALI  
 3000K

CONFIGURACION ONLINE / ONLINE CONFIGURATION



Código / Code	Referencia / Reference	Kg / Kg	Potencia / Power	Lúmenes / Lumens	Eficiencia / Efficiency	CCT (K) / CCT (K)
CCA213K4B	PLANET/N CIRCULAR ABIERTO-640-37W 3400lm/840+SUS	5,4	37W	3400	92 lm/W	4000
CCA214K7B	PLANET/N CIRCULAR ABIERTO-640-53W 4700lm/840+SUS	5,4	53W	4700	89 lm/W	4000
CCA216K5B	PLANET/N CIRCULAR ABIERTO-640-78W 6500lm/840+SUS	5,4	78W	6500	83 lm/W	4000
CCA314K6B	PLANET/N CIRCULAR ABIERTO-840-49W 4600lm/840+SUS	8,4	49W	4600	94 lm/W	4000
CCA316K3B	PLANET/N CIRCULAR ABIERTO-840-71W 6300lm/840+SUS	8,4	71W	6300	89 lm/W	4000
CCA318K7B	PLANET/N CIRCULAR ABIERTO-840-105W 8700lm/840+SUS	8,4	105W	8700	83 lm/W	4000
CCA415K7B	PLANET/N CIRCULAR ABIERTO-1045-62W 5700lm/840+SUS	12,0	62W	5700	92 lm/W	4000
CCA417K8B	PLANET/N CIRCULAR ABIERTO-1045-89W 7800lm/840+SUS	12,0	89W	7800	88 lm/W	4000
CCA4110KB	PLANET/N CIRCULAR ABIERTO-1045-131W 10800lm/840+SUS	12,0	131W	10800	82 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI      T.COLOR 3000K