

# CENSER/S-75-91-128

## ES

**Montaje:** Adosable.  
**Fuente de luz:** Módulos compactos LED COB. Temperatura de color 4000K. Disponible, 3000K.  
**Sistema óptico:** Reflector: Aluminio brillo. Disponible, aluminio mate y negro.  
**Distribución luminosa:** Directa. Estándar 24°. Disponible 16°, 38°, 50°.  
**Equipo eléctrico:** Equipo de control electrónico. PF>0,95. Disponible, regulable DALI.  
**Materiales:** Cuerpo: Aluminio extruido lacado en blanco. Reflector: Aluminio anodizado brillante. Cierre: Cristal transparente.  
**Acabado:** Color blanco RAL 9003 (estándar). Opcional negro RAL 9005.




## EN

**Mounting:** Surface.  
**Light source:** LED compact modules COB. Temperature color 4000K. Available, 3000K.  
**Optical system:** Reflector: Shiny aluminium. Available, matt aluminium and black.  
**Light distribution:** Direct. Standard 24°. Available 16°, 38°, 50°.  
**Electrical equipment:** Electronic control gear. PF>0,95. Available, dimmable DALI.  
**Materials:** Body: Aluminum extruded lacquered in white. Reflector: Bright anodized aluminum. Cover: Transparent glass.  
**Surface finish:** White color RAL 9003 (standard). Optional black RAL 9005.




ESTANDAR | STANDARD


CENSER-128-24°-24W




CENSER-128-16°-24W



CENSER-128-38°-24W



CENSER-128-55°-24W




FLICKER FREE



<17

ESTANDAR COLOR BLANCO  
STANDARD WHITE COLOR

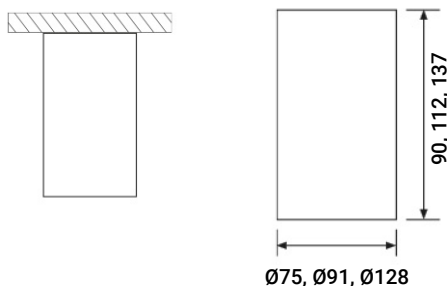

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS  
 220-240V / 50-60Hz  
 IP 20  
 IK 04  
 CLASE I / CLASS I  
 50.000h / L80B10  
 -20° / +40°  
 CRI 80  
 24°

DISPONIBLE/AVAILABLE

DALI  
 3000K  
 16° / 38° / 50°

CONFIGURACION ONLINE  
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
CES211K1B	CENSER/S-75-24°-9W 1100lm/840	0,4	9W	1100	122 lm/W	4000
CES312K0B	CENSER/S-91-24°19W 1970lm/840	0,6	19W	1970	105 lm/W	4000
CES412K3B	CENSER/S-128-24°24W 2080lm/840	0,8	24W	2080	96 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING DALI      T.COLOR 3000K      OPTICA/LENS 16°, 38°, 50°