

## DIVIC/ASY

### ES

Montaje: Empotrable.

Fuente de luz: Módulos compactos LED COB.  
Temperatura de color 4000K. Disponible, 3000K.

Sistema óptico: Reflector pulido asimétrico (ASP).

Distribución luminosa: Asimétrica.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.  
Disponible, regulable DALI.

Materiales: Cuerpo: Chapa de acero. Difusor: PMMA microprismático,  
Reflector: aluminio anodizado pulido. Cierre: PMMA transparente (ver-  
sión IP44).

Acabado: Esmaltado de alta resistencia en color blanco RAL 9003.



### EN

Mounting: Recessed.

Light source: LED compact modules COB.  
Temperature color 4000K. Available, 3000K.




Optical system: Asymmetric polished reflector (ASP).

Light distribution: Asymmetric.

Electrical equipment: Electronic control gear. PF>0,95.  
Available, dimmable DALI.




Materials: Body: Sheet steel. Diffuser: microprismatic PMMA. Reflector:  
polished anodised aluminium. Cover: Transparent PPMA (IP44 version).

Surface finish: High resistance enamel in white RAL 9003.

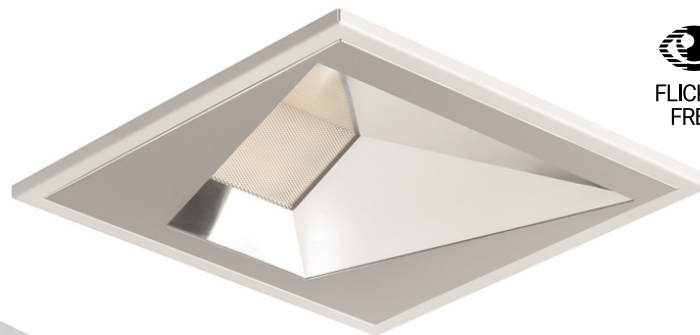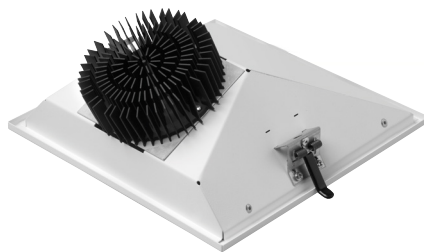



FLICKER  
FREE

DIVIC/ASY-265

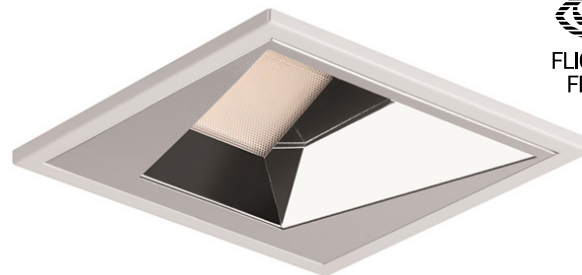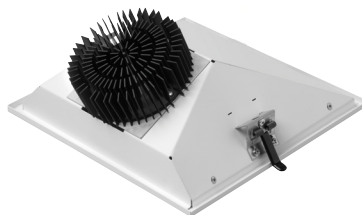

FLICKER  
FREE



DIVIC/ASY-215

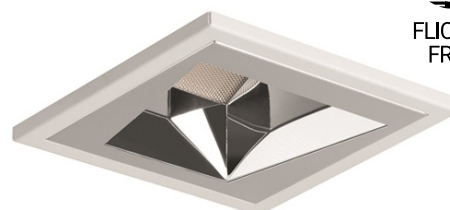


FLICKER  
FREE

DIVIC/ASY-165



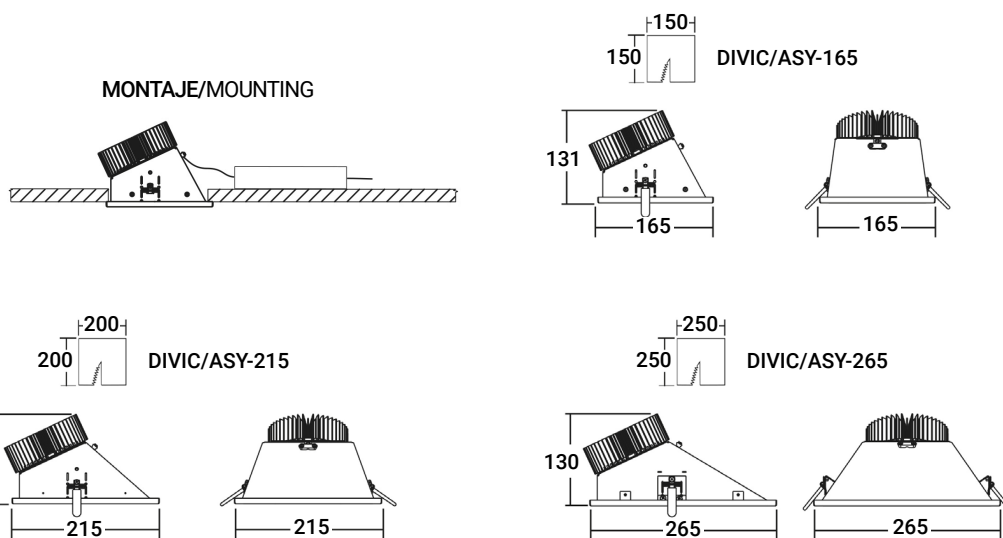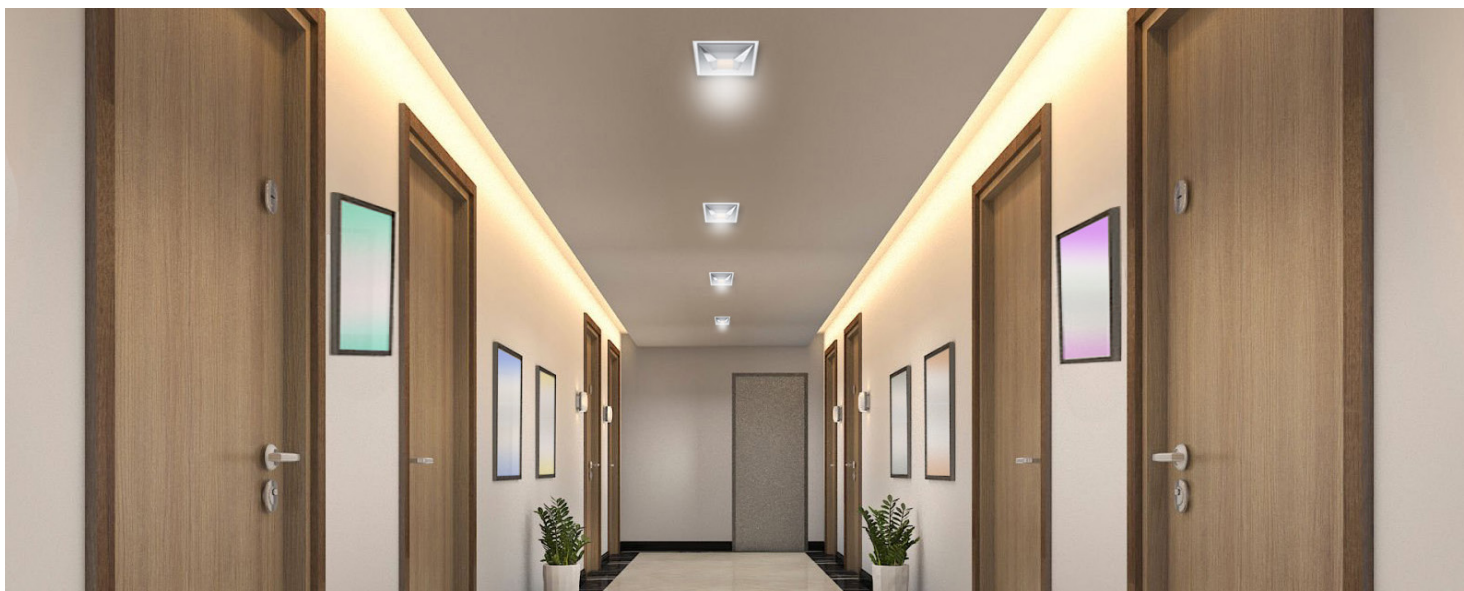

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE  
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
DCA101K5B	<b>IP-40</b> DIVIC/ASY-165-14W 1500lm/840	0,9	14W	1500	107 lm/W	4000
DCA102K1B	<b>IP-40</b> DIVIC/ASY-165-20W 2150lm/840	0,9	20W	2150	107 lm/W	4000
DCA202K1B	<b>IP-40</b> DIVIC/ASY-215-20W 2150lm/840	1,2	20W	2150	107 lm/W	4000
DCA202K6B	<b>IP-40</b> DIVIC/ASY-215-24W 2650lm/840	1,2	24W	2650	110 lm/W	4000
DCA303K1B	<b>IP-40</b> DIVIC/ASY-265-29W 3100lm/840	1,5	29W	3100	107 lm/W	4000
DCA303K5B	<b>IP-40</b> DIVIC/ASY-265-33W 3550lm/840	1,5	33W	3550	107 lm/W	4000
DCA111K5B	<b>IP-44</b> DIVIC/ASY-165-IP44-14W 1500lm/840	0,9	14W	1500	107 lm/W	4000
DCA112K1B	<b>IP-44</b> DIVIC/ASY-165-IP44-20W 2150lm/840	0,9	20W	2150	107 lm/W	4000
DCA212K1B	<b>IP-44</b> DIVIC/ASY-215-IP44-20W 2150lm/840	1,2	20W	2150	107 lm/W	4000
DCA212K6B	<b>IP-44</b> DIVIC/ASY-215-IP44-24W 2650lm/840	1,2	24W	2650	110 lm/W	4000
DCA313K1B	<b>IP-44</b> DIVIC/ASY-265-IP44-29W 3100lm/840	1,5	29W	3100	107 lm/W	4000
DCA313K5B	<b>IP-44</b> DIVIC/ASY-265-IP44-33W 3550lm/840	1,5	33W	3550	107 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI T.COLOR 3000K DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)