

## WOOD-C2

### ES

**Montaje:** Suspendido.  
**Fuente de luz:** Módulos lineales LED SMD TRIDONIC.  
 Temperatura de color 4000K. Disponible, 3000K.  
**Sistema óptico:** Reflector de aluminio mate.  
 Óptica estándar LEDIL 80°. Disponible, 50°  
**Distribución luminosa:** Directa.  
**Equipo eléctrico:** Equipo de control electrónico (no integrado).  
 PF>0,95. Disponible, regulable DALI.  
**Materiales:** Cuerpo: Madera tratada en diferentes acabados.  
**Acabado:** Haya. Disponible, roble y sapele.




### EN



**Mounting:** Suspended.  
**Light source:** TRIDONIC SMD LED linear modules.  
 Temperature color 4000K. Available, 3000K.  
**Optical system:** Mate aluminum reflector.  
 LEDIL standard lens 80°. Available, 50°.  
**Light distribution:** Direct.  
**Electrical equipment:** Electronic control gear (not integrated).  
 Available, dimmable DALI.  
**Materials:** Body: Treated wood in different finishes.  
**Surface finish:** Beech color. Available, Oak and sapele.




ESTANDAR | STANDARD  
 WOOD-C2-80°-21W




WOOD-C2-50°-21W

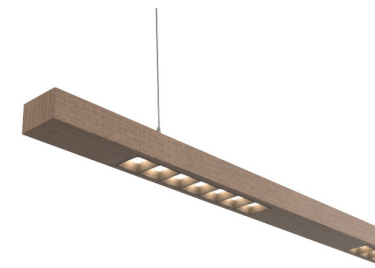

ROBLE/OAK

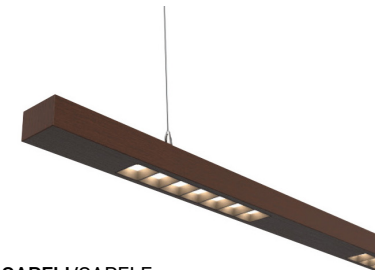

SAPELI/SAPELE

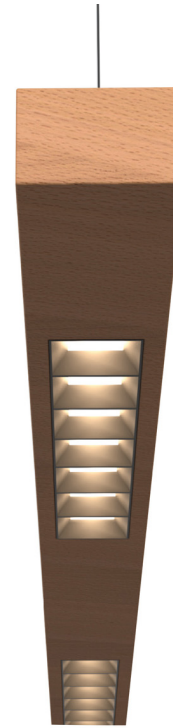


HAYA/BEECH




FLICKER FREE



<17



ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE  
 ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K)
WC1322K4H	WOOD-C2-80°-1120-15W 2400lm/840+SUS	1,8	15W	2400	160 lm/W	4000
WC1323K4H	WOOD-C2-80°-1120-21W 3400lm/840+SUS	1,8	21W	3400	162 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI T.COLOR 3000K OPTICA/LENS 50°  
 FLORON PORTAEQUIPOS DE MADERA/WOODEN EQUIPMENT HOLDER FLORON PORTAEQUIPOS METALICO/METAL EQUIPMENT HOLDER